

iiipa®

INTERNATIONAL





Multifunctional technology for easy cooking, frying, grilling...

Savings



ENERGY SAVINGS



SPACE SAVING



WATER SAVINGS



RESOURCE SAVING



TIME SAVING

Diversity



VARIABILITY OF HEAT TREATMENTS



WIDE MODEL RANGE

CZ
ENG
DE...

MULTIPLE LANGUAGE VERSIONS



CREATION AND MODIFICATION OF OWN RECIPES

Flexibility



REPLACES TRADITIONAL TECHNOLOGIES



PARALLEL PREPARATION OF MULTIPLE DISHES ON ONE DEVICE



EASY MAINTENANCE



EASY TO USE INTUITIVE 12" DISPLAY

CONTROL PANEL



- digital support
- recipe management
- always the same result

- 12" colour touch screen
- Fast response
- Chemically hardened
- Multiple language versions

- Preset technological procedures
- Display of information messages
- HACCP Display directly on the Display
- Display of the food treatment process directly on the Display




- 12" touch screen
- Liquid level scale
- Electromechanical pan tilting
- Automatic water filling
- Water drain from the bottom of the pan

- Shower with automatic winding

- Multi-point probe

- Excess steam extraction

- 230 V/16 A socket + USB socket






iipā DESIGN

- Central connection of water, drain and electricity from the wall or floor.
- Special bottom with double-sided weld.
- The control panel can be positioned on the left or right.
- 12" touch screen.
- Excess steam exhaust through the chimney in the centre of the lid.
- Hygienic multipoint probe holder.
- Designed for placement on building plinth or CN plinth.
- Liquid quantity gauge.
- Electrical socket and USB input located in the leg.
- Material AISI 304.
- Material of the pan AISI 316.

iipā STANDARD

- Automatic basket lifting, driven by a separate motor, with the possibility of use with the lid closed.
- Sensor for detecting the hanging of the basket arm.
- Safety lid operation process to prevent accidents.
- JPX 17 - All-round heating with thick film heating elements.
- Insulated bath, ensures minimum electricity consumption.
- Automatic water filling system.
- Two-speed electromechanical bath tilting.
- Multi-point probe.
- Integrated shower with Automatic winding.
- HACCP - Hazard Analysis and Critical control point system.
- Internet connection.
- Service access from the front and top of the unit.
- Unique depressurisation system without direct water consumption.

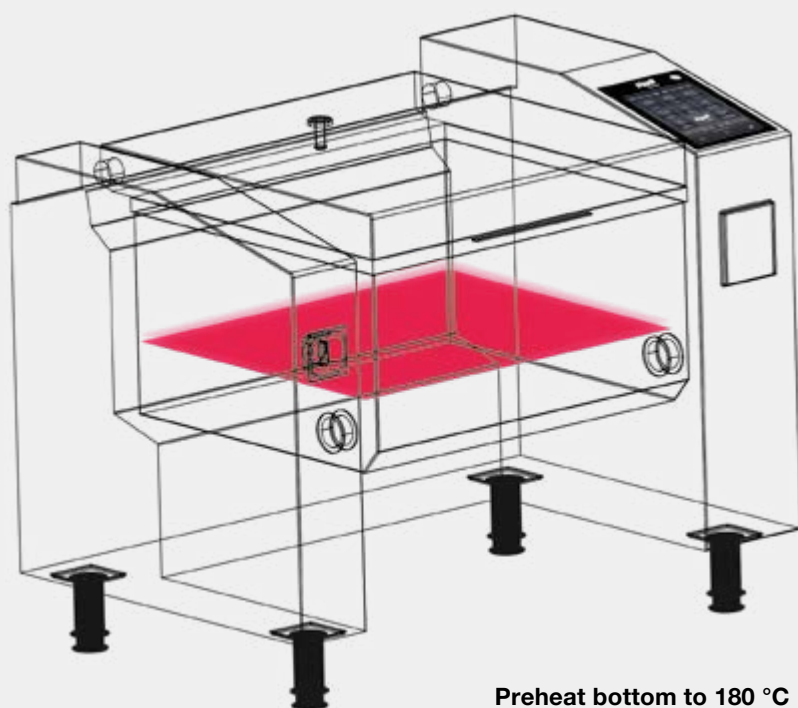

JPX 17 - Thick film heating elements

- Ensures even temperature distribution over the entire surface

Maximum performance with maximum precision

Special pan bottom

- Scratch-resistant
- Ensures precise temperature control
- No burning
No overcooking
Easy cleaning



Preheat bottom to 180 °C
from operating temperature
in 3 minutes



Temperature range
30 - 250 °C



ijpā ACCESSORIES



BATTERY-POWERED LIFTING TROLLEY ▾

- Mobile use without permanent connection to the electricity supply
- Easy handling during emptying of the pan
- Safety handle
- Safety locking of the power cable
- Easy removal of GN
- Hygienic rollers with locking
- Dimensions 600 × 780 × 990 mm
- Weight 55 kg
- Load capacity 40 kg



OIL FILTER TROLLEY ▾

- Safe oil filtering
- Removable and washable filter
- Safety lock for power cord
- Safety handle
- Hygienic rollers with locking rotatable filling arm
- Dimensions 625 × 625 × 1 150 mm
- Weight 65 kg
- Capacity 50 l




TRANSPORT TROLLEY FOR COOKING AND FRYING BASKETS ▾

- Easy and safe storage, transport and dripping of containers
- Removable drip tray for easy maintenance
- Hygienic rollers with locking mechanism
- Safe handling
- Dimensions 600 × 860 × 1 600 mm
- Weight 25 kg
- 6 basket capacity

OTHER ACCESSORIES ▾

- Cooking basket
- Frying basket
- Small baskets for à la carte dishes
- Spatula with handle
- Spatula without handle
- Arm for automatic basket lifting
- Grid 1/1 for LT-cooking
- Drain strainer
- Spaetzle sieve

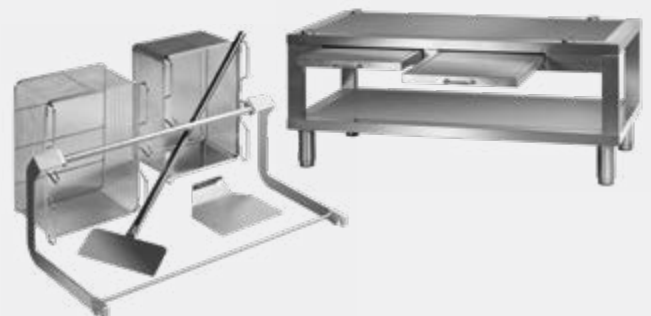



INTERNATIONAL

JIPA International s.r.o.
Formanská 6, 149 00 Praha-Újezd
Czech Republic

info@jipainternational.cz
www.jipainternational.cz

